


PRODUCT SPECIFICATIONS

3701IC014

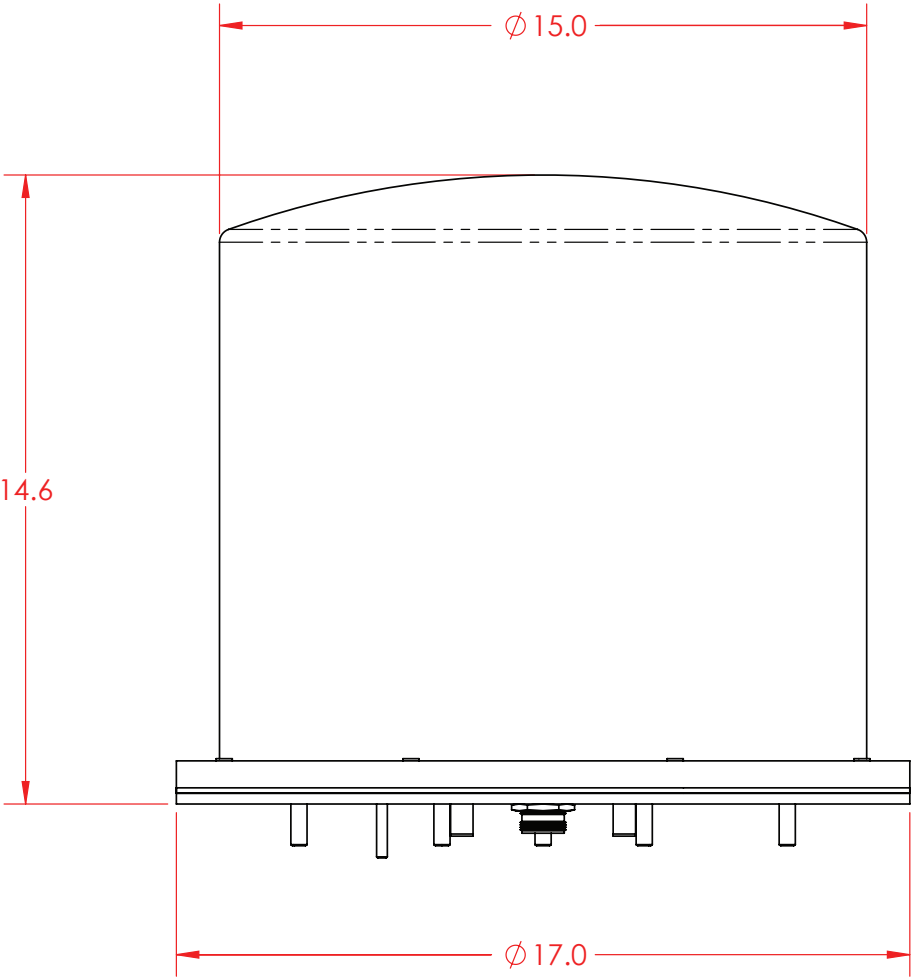

Specifications

3701IC014 - S-Band Electronic Steerable Antenna

FREQUENCY (MHZ)	2200 - 2500 MHz
POLARIZATION	V + H
GAIN (PEAK)	12 dBi
AZIMUTH BW (NOMINAL)	50°
ELEVATION BW (NOMINAL)	13°
VSWR	2.0:1 Typical (2.5:1 Max)
AVAILABLE BEAM MODES	Single or Multibeam Mode
RF POWER INPUT	+33 dBm

Physical Specifications

DIMENSIONS	14.6" x 17" (371mm x 432mm)
WEIGHT	35 lbs (16kg)
ENVIRONMENTAL	IP66 / Operating:-40 to 60°C / Storage:-40 to 70°C
POWER	24VDC High Power PoE
CONNECTORS	RF: 2x N-Type INTERFACE: 1x RJ-45 / RS-232 (Optional)
MOUNTING	Multiple Mounting Options Available



Military Sales & Inquiries
 Sales +1-888-955-8228 x105
 Support +1-317-500-4506
 Email mil.sales@batswireless.com